Network Security

Chapter 2
Basics of Cryptography

- Overview Cryptographic Algorithms
- Attacking Cryptography
- Properties of Encryption Algorithms
- Classification of Encryption Algorithms

© Dr.-Ing G. Schäfer

Cryptographic Algorithms: Overview

- During this course two main applications of cryptographic algorithms are of principal interest:
  - *Encryption* of data: transforms plaintext data into ciphertext in order to conceal its' meaning
  - *Signing* of data: computes a *check value* or *digital signature* to a given plain- or ciphertext, that can be verified by some or all entities being able to access the signed data
- Some cryptographic algorithms can be used for both purposes, some are only secure and / or efficient for one of them.
- Principal categories of cryptographic algorithms:
  - *Symmetric cryptography* using 1 key for en-/decryption or signing/checking
  - *Asymmetric cryptography* using 2 different keys for en-/decryption or signing/checking
  - *Cryptographic hash functions* using 0 keys (the "key" is not a separate input but "appended" to or "mixed" with the data).

© Dr.-Ing G. Schäfer

Attacking Cryptography (1): Cryptanalysis

- *Cryptanalysis* is the process of attempting to discover the plaintext and / or the key
- Types of cryptanalysis:
  - *Ciphertext only:* specific patterns of the plaintext may remain in the ciphertext (frequencies of letters, digraphs, etc.)
  - *Known ciphertext / plaintext pairs*
  - *Chosen plaintext or chosen ciphertext*
  - *Differential cryptanalysis & linear cryptanalysis*
  - Newer development: *related key analysis*
- Cryptanalysis of public key cryptography:
  - The fact that one key is publicly exposed may be exploited
  - Public key cryptanalysis is more aimed at breaking the cryptosystem itself and is closer to pure mathematical research than to classical cryptanalysis
  - Important directions:
    - Computation of discrete logarithms
    - Factorization of large integers



© Dr.-Ing G. Schäfer

Attacking Cryptography (2): Brute Force Attack

- The *brute force attack* tries every possible key until it finds an intelligible plaintext:
  - Every cryptographic algorithm can in theory be attacked by brute force
  - On average, half of all possible keys will have to be tried

Average Time Required for Exhaustive Key Search

Key Size [bit]	Number of keys	Time required at 1 encryption / μs	Time required at 10^6 encryption / μs
56	$2^{56} = 7.2 \times 10^{16}$	2^{55} μs = 1142 years	10.01 hours
128	$2^{128} = 3.4 \times 10^{38}$	2^{127} μs = 5.4×10^{24} years	5.4×10^{18} years
256	$2^{256} = 1.2 \times 10^{77}$	2^{255} μs = 3.7×10^{63} years	3.7×10^{57} years



© Dr.-Ing G. Schäfer

Attacking Cryptography (3): How large is large?

Reference Numbers Comparing Relative Magnitudes			
Reference		Magnitude	
Seconds in a year		≈ 3	x 10^{7}
Seconds since creation of solar system		≈ 2	x 10^{17}
Clock cycles per year (50 MHz computer)		≈ 1.6	x 10^{15}
Binary strings of length 64	2^{64}	≈ 1.8	x 10^{19}
Binary strings of length 128	2^{128}	≈ 3.4	x 10^{38}
Binary strings of length 256	2^{256}	≈ 1.2	x 10^{77}
Number of 75-digit prime numbers		≈ 5.2	x 10^{72}
Electrons in the universe		≈ 8.37	x 10^{77}



© Dr.-Ing G. Schäfer

Important Properties of Encryption Algorithms

Consider, a sender is encrypting plaintext messages P_1, P_2, ... to ciphertext messages C_1, C_2, ...

Then the following properties of the encryption algorithm are of special interest:

- *Error propagation* characterizes the effects of bit-errors during transmission of ciphertext to reconstructed plaintext P_1', P_2', ...
  - Depending on the encryption algorithm there may be one or more erroneous bits in the reconstructed plaintext per erroneous ciphertext bit
- *Synchronization* characterizes the effects of lost ciphertext data units to the reconstructed plaintext
  - Some encryption algorithms can not recover from lost ciphertext and need therefore explicit re-synchronization in case of lost messages
  - Other algorithms do automatically re-synchronize after 0 to n (n depending on the algorithm) ciphertext bits



© Dr.-Ing G. Schäfer

Classification of Encryption Algorithms: Three Dimensions

- The type of operations used for transforming plaintext to ciphertext:
  - *Substitution*, which maps each element in the plaintext (bit, letter, group of bits or letters) into another element
  - *Transposition,* which re-arranges elements in the plaintext
- The number of keys used:
  - *Symmetric ciphers,* which use the same key for en- / decryption
  - *Asymmetric ciphers,* which use different keys for en- / decryption
- The way in which the plaintext is processed:
  - *Stream ciphers* work on bit streams and encrypt one bit after another:
    - Many stream ciphers are based on the idea of linear feedback shift registers, and there have been detected vulnerabilities of a lot of algorithms of this class, as there exists a profound mathematical theory on this subject.
    - Most stream ciphers do not propagate errors but are sensible to loss of synchronization.
  - *Block ciphers* work on blocks of width *b* with *b* depending on the specific algorithm.



© Dr.-Ing G. Schäfer

Cryptographic Algorithms – Outline

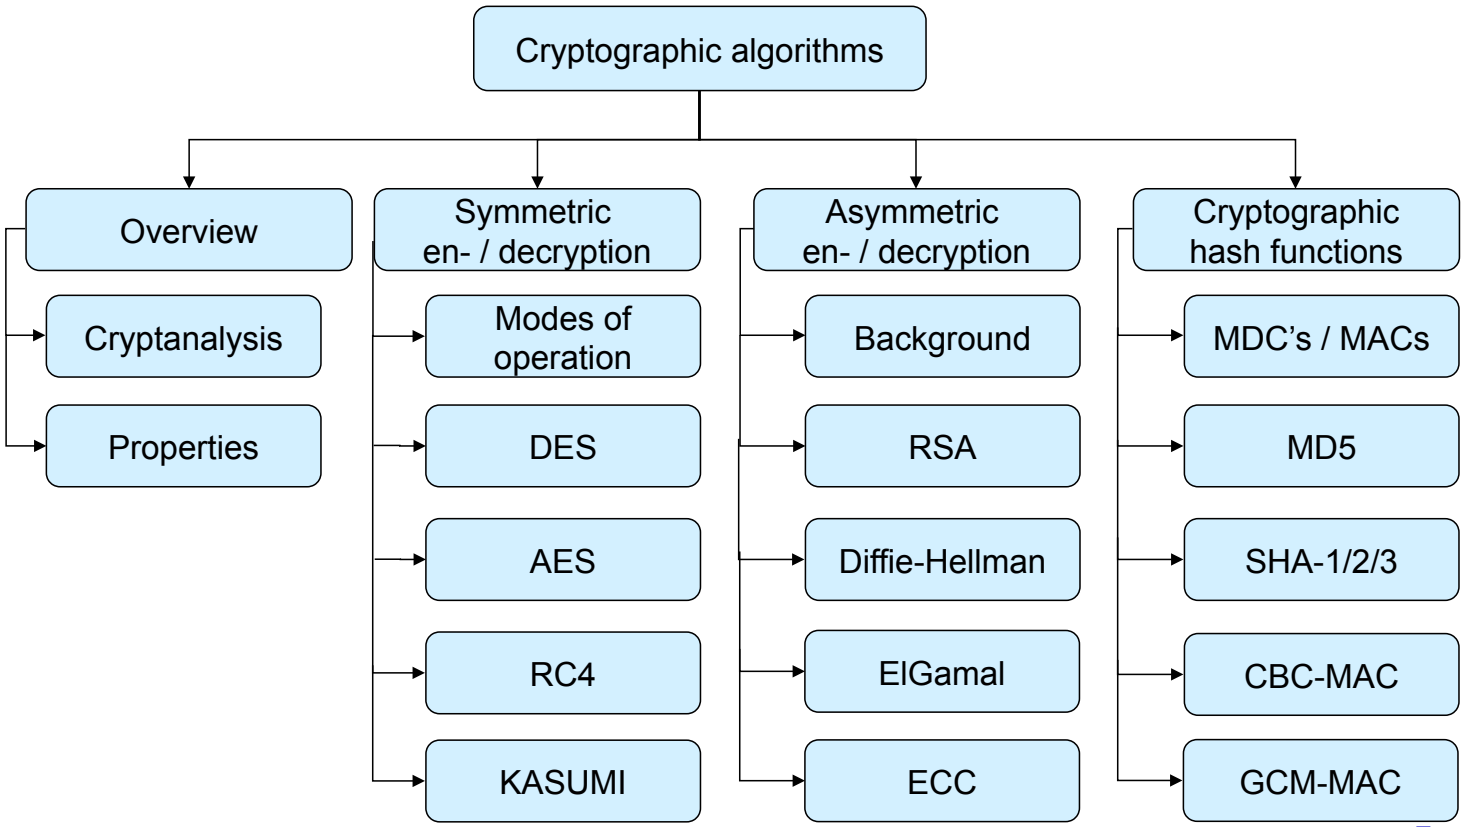



© Dr.-Ing G. Schäfer